


DP10LSA180 Data Sheet

Krone Strip SPD


SURGE
PROTECTION DEVICES
LTD

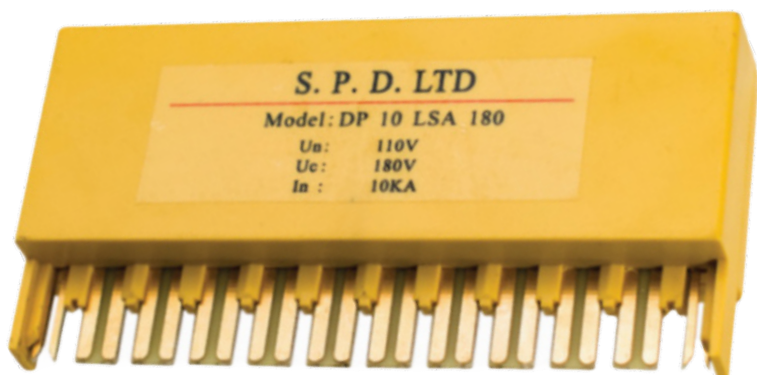

- Combined category D, C & B to BS EN 61643-21
- 10 Pair Krone system installation
- 2 Stage protection



SCAN THE QR CODE FOR THE
**INSTALLATION
INSTRUCTIONS**

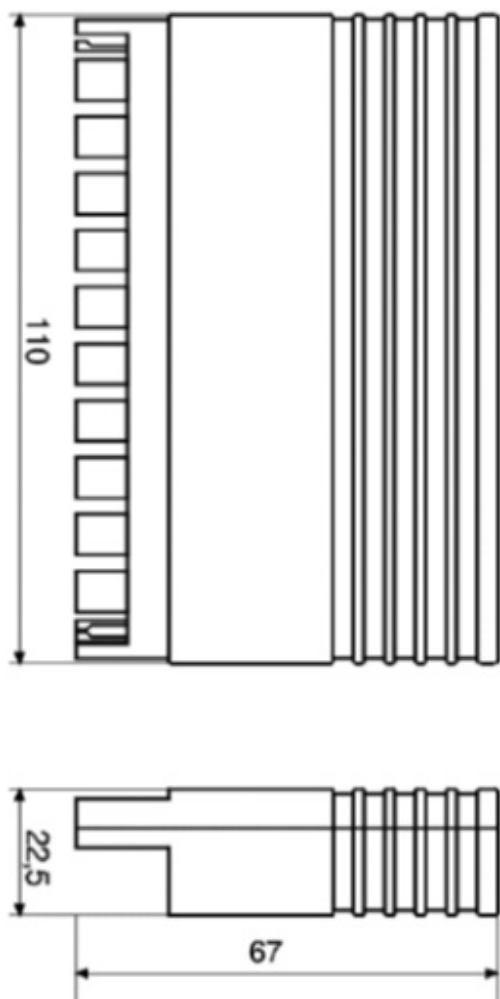

Technical Data	DB10LSA180
Nominal Voltage - U_n	110V
Maximum Continuous Voltage - U_c	180V
Nominal Discharge Current 8/20 μ s - I_n	5kA
Maximum Discharge Current 8/20 μ s - I_{max}	10kA
Voltage Protection Level - U_p @ I_n	$\leq 220V$
Response Time - t_A	$\leq 1ns$
Nominal Operating Current @ 25°C	145mA
Series Inductance @ 25°C - L	47 μ H
Series Resistance Per Line @ 25°C - R	3-6 Ω
Bandwidth - f_o	$\leq 1.2MHz$
Input/Output Connections	Krone
Operating Temperature	-20°C to +65°C